

fig. 74

IMPORTANT After concluding these operations, you are however recommended to contact Alfa Romeo Authorised Services to restore regular top operation.

Opening the top

Emergency opening of the top shall be carried out at Alfa Romeo Authorised Services.

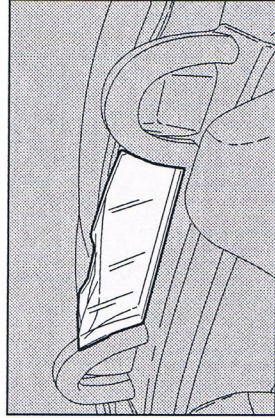


fig. 75

WIND STOPPER (where provided)

The wind stopper located behind the seats **fig. 75**, improves driving comfort at whatever speed since it limits air turbulence that forms inside the passenger's compartment when driving with the top fully open.

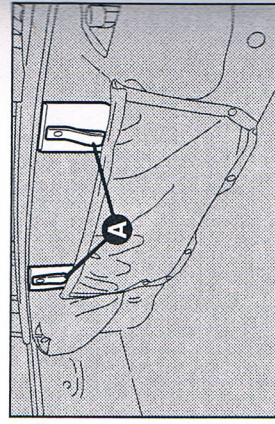


fig. 76

Fitting

Press button **C-fig. 61** to stow the top into its housing.

Proceed as follows:

- Stop the top cover at open position (when the top is stowed in its housing) to access the fixings of the two caps fitted into the slots of the finishing on the upper wall between the Roll Bars and that can be reached from the front side of the top housing.

- Open the two doors pulling the relevant tongs **A-fig. 76** and unscrew the two knobs that fix the plugs. Remove the plugs and insert the Wind stopper in the two horizontal slots

WARNING
Wind stopper fitting and removal operations shall be carried out with the top cover open and the top folded into the space provided for the purpose.